

EXPLODED VIEW & PARTS LISTING

Air Operated Double Diaphragm Pump

Model: G15AN

Part # 854700



To Purchase:

☎ 800-990-7867

✉ sales@yamadapump.com

📍 Find My Rep


More Information:

▶ YouTube: @yamadapump

🌐 yamadapump.com

*Data Sheets | CAD Drawings | Manuals
Literature | BOM | Performance Curves*

Trial Program

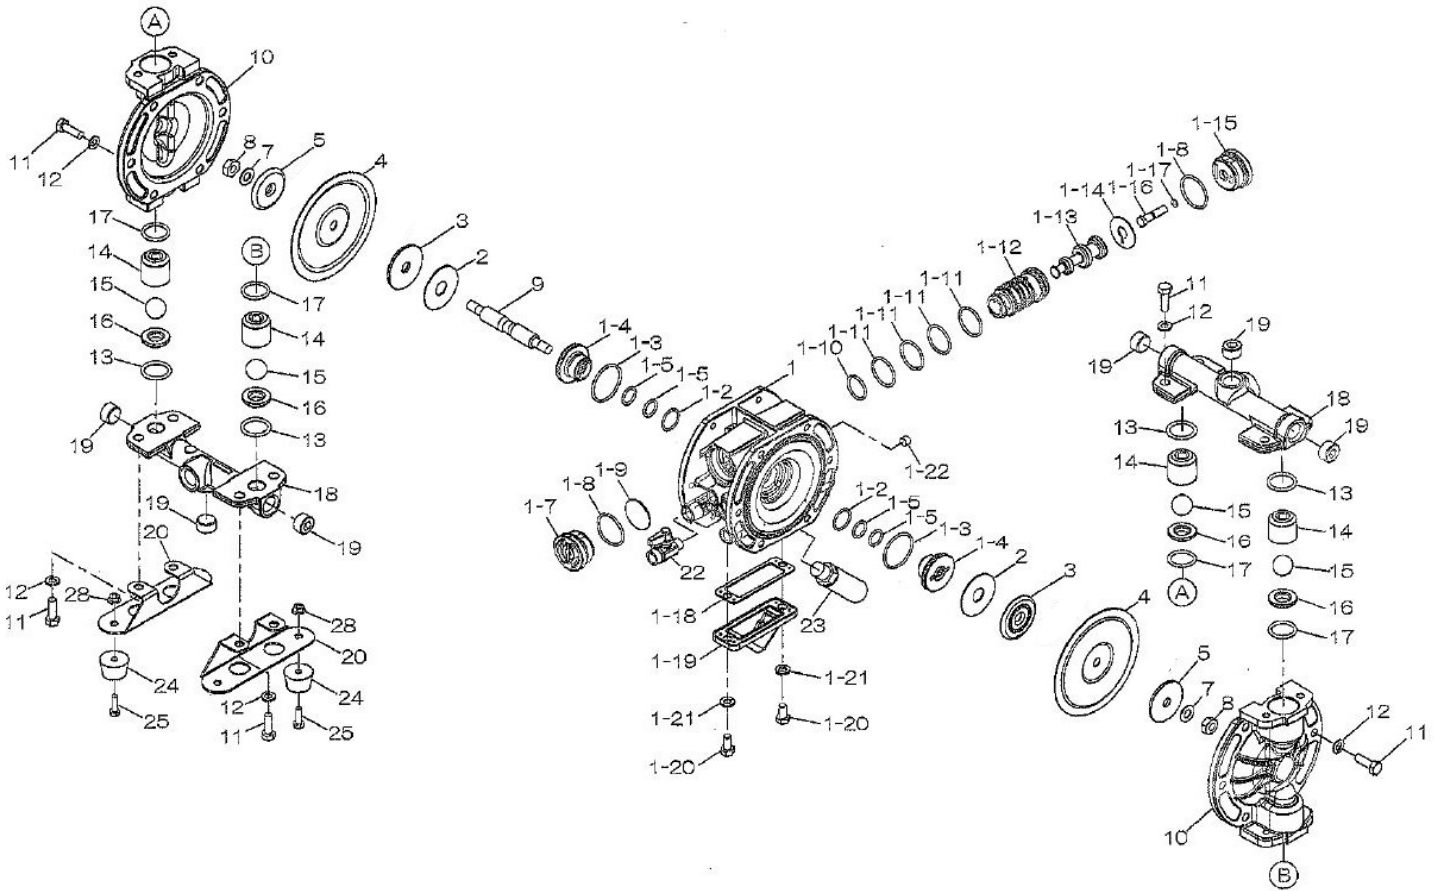

Air Operated Double Diaphragm Pump



Ref. No.	Description	Qty.	Part No.	Reorder
1	Body Assy.	1	805130	
2	Cushion	2	773278	
3	Center Disk	2	716923	
4	Diaphragm	2	773277	
5	Center Disk	2	716924	
7	Lock Washer M10 SS	2	681303	
8	Nut M10x1.50	2	683636	
9	Center Rod	1	716925	
10	Out Chamber	2	716920	
11	Bolt	20	611149	
12	Wave Washer	20	631916	
13	O-ring	4	640025	
14	Ball Guide	4	716921	
15	Ball	4	771525	
16	Valve Seat 15AL	4	711227	
17	O-ring	4	640130	
18	Manifold	2	717084	
19	Plug 1/2" NPT	6	686789	
20	Base	2	716926	
22	Ball Valve	1	683055	
23	Silencer	1	682520	
24	Foot Rubber	4	771123	
25	Bolt M6x1.0x20	4	611101	
28	Nut w/Flange M6x1.0	4	682817	

Repair Kits

KG15-AN Liquid Side Kit includes the following:


Ref. No.	Description	Qty.	Part No.	Reorder
4	Diaphragm	2	773277	
13	O-ring	4	640025	
15	Ball	4	771525	
17	O-ring	4	640130	

KG15AM-M Side Kit includes the following:

Ref. No.	Description	Qty.	Part No.	Reorder
1-2	O-ring	2	684725	
1-3	O-ring	2	686733	
1-5	O-ring	4	640015	
1-8	O-ring	2	686734	
1-9	Cushion	1	773280	
1-11	O-ring	4	686029	
1-13	Spool Assembly	1	805131	
1-14	Cushion	1	773281	
1-17	O-ring	1	640002	
1-18	Gasket	1	773283	

Body Assembly

Ref. No.	Description	Qty.	Part No.	Reorder
1-1	Body	1	717082	
1-2	O-ring	2	684725	
1-3	O-ring	2	686733	
1-4	Guide Bush	2	773279	
1-5	O-ring	4	640015	
1-7	Cap A	1	716917	
1-8	O-ring	2	686734	
1-9	Cushion	1	773280	
1-10	O-ring	1	685276	
1-11	O-ring	4	686029	
1-12	Sleeve	1	716950	
1-13	Spool Assy.	1	805131	
1-14	Cushion	1	773281	
1-15	Cap B	1	716918	
1-16	Reset Button	1	717035	
1-17	O-ring	1	640002	
1-18	Gasket	1	773283	
1-19	Cover	1	717083	
1-20	Wave Washer	2	631916	
1-21	Bolt 8x1.25x16	2	611145	
1-22	Plug 1/8"	1	634360	



Tightening torque for center rod and out chambers.

Center Rod 122 in-lbf {14 N-m}
Out Chambers 105 in-lbf {12 N-m}

Tightening torque for manifold retainer bolts.

BA_ 105 in-lbf {12 N-m}

General Tools:

- Socket wrench - 13mm
- Hexagonal box wrenches - 5mm
- Open-end wrench - 21mm
- Snap ring pliers

Miscellaneous:

- Assembly Oil—turbine oil none additional class 1 (equivalent to ISA VGA32 grade)
- Urea grease grade (NLGI) No. 2

Customer Notes

Model #: _____
Description: _____
Serial #: _____
Date Installed: _____
Department Location: _____
Tag/Project: _____