yamada®

GLOBAL SERIES
Air-Powered Double Diaphragm Pumps

# G15 Stainless Steel



14.8 GPM Maximum Flow Rate

1/2 inch Port Size

The G15 Series Stainless Steel Pumps are designed to provide maximum performance, while maintaining the reliability that you've grown accustomed to from Yamada. These 1/2" pumps are perfect for spraying and dispensing applications, particularly when on and off cycling reliability is critical. Utilizing our new Step Spool (S-Spool), the G15 uses up to 30% less air than the competition. Maintenance is also a breeze with fewer removeable parts.
Find out today why our motto is "The Proof's in the Pump®"!

**ENGINEERED TO PERFORM.**
**DESIGNED TO OUTLAST.®**

## APPLICATIONS:




## FEATURES & BENEFITS

- No lubrication required
- Stall Free / S-Spool Design
- Fewer Wearing Parts
- Ease of Repair - Quick teardown / Rebuild
- 30% less air consumption over competitor's pumps
- Perfect for dispensing and spraying applications
- Critical reliability for On/Off cycling


GLOBAL SERIES
Air-Powered Double Diaphragm Pumps

# G15 Stainless Steel

## 1/2" Port Size

## 14.8 GPM

Stall-Free Operation

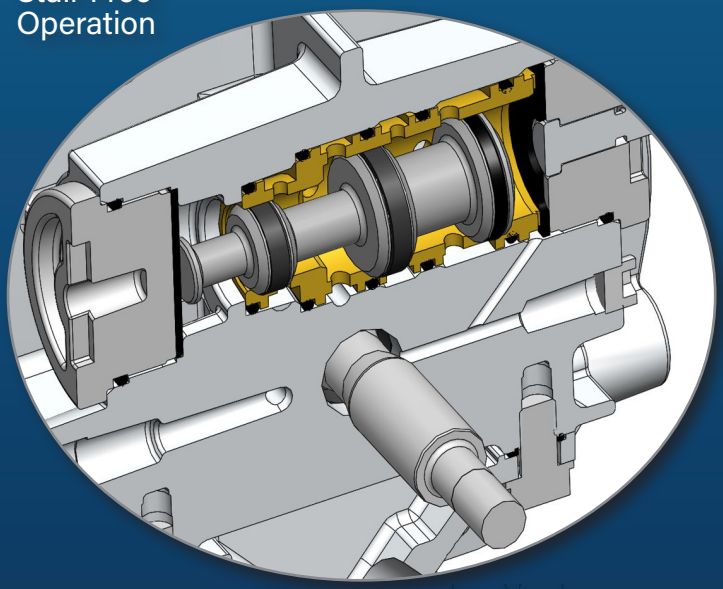

## TECHNICAL SPECIFICATIONS

| | |
|---|---|
| Maximum Flow Rate | 14.8 GPM |
| Port Size | 1/2" Female NPT |
| Air Supply Pressure | 20-100 PSI |
| Liquid Temperature | 32-212°F |
| Maximum Air Consumption | 18 SCFM |
| Weight | 18.1 lbs. |
| Maximum Size Solid | 1/32" (1 mm) |
| NPT Dimensions | 7.64" L x 6.1" W x 10.43" H |
| Air Inlet | 1/4" Female NPT |
| Body Material | Stainless Steel (316) |
| Discharge Volume Per Cycle | 0.039 Gallons |
| Dry Suction Lift | Rubber 15' / PTFE 12' |


FEWER *Parts.*
INCREASED *Reliability.*

Step-Spool



## ELASTOMERIC OPTIONS

- PTFE
- Buna N
- Hytrel®
- Santoprene®

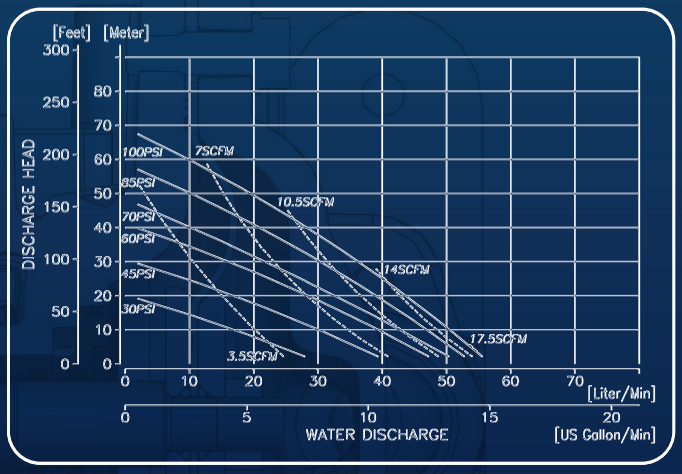


**YamadaPump.com**

**Toll Free (800) 990-7867**

Local Distributor:


yamada

Yamada® is a registered trademark of Yamada America, Inc.
The Proof's in the Pump® is a registered trademark of Yamada America, Inc.
The Proof is in the Pump® is a registered trademark of Yamada America, Inc.
SolidPro® Designed to Pump Fluids Containing Solids is a registered trademark of Yamada America, Inc.
Xtreme Duty Pro XDP® is a registered trademark of Yamada America, Inc.
InkPRO® is a registered trademark of Yamada America, Inc.
Santoprene® is a registered trademark of Monsanto Co.

Step Spool (S-Spool) C.L. 3/2/2017

Form# G15S1126