
yamada®

GLOBAL SERIES

Air-Powered Double Diaphragm Pumps

ENGINEERED TO PERFORM.
DESIGNED TO OUTLAST.®

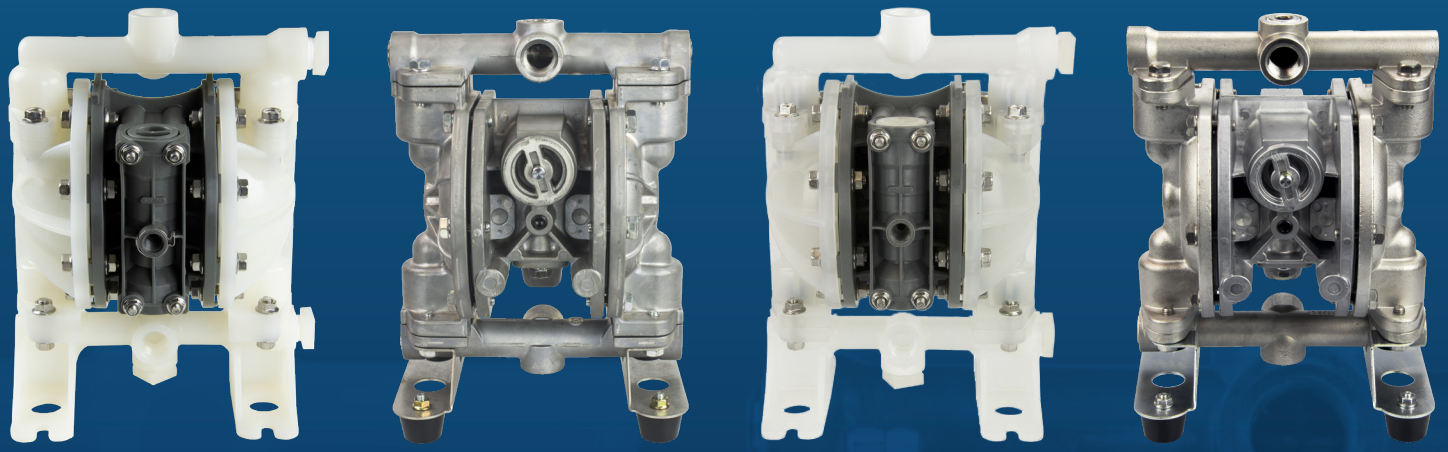

KYNAR | ALUMINUM | PURE POLYPROPYLENE | STAINLESS STEEL

The new G15 Series Pumps are designed to provide maximum performance, while maintaining the reliability that you've grown accustomed to from Yamada. These 1/2" pumps are perfect for spraying and dispensing applications, particularly when on and off cycling reliability is critical. Utilizing our new Step Spool (S-Spool), the G15 uses up to 30% less air than the competition. Maintenance is also a breeze with fewer removeable parts. Find out today why our motto is "The Proof's in the Pump®"!

FEATURES & BENEFITS

- No lubrication required
- Stall-Free / S-Spool design
- Fewer wearing parts
- Ease of Repair - Quick teardown and Rebuild
- 30% less air consumption over competitor's pumps
- Perfect for dispensing and spraying applications
- Critical reliability for On/Off cycling
- No pilot valve

APPLICATIONS:

The Proof's in the Pump.




GLOBAL SERIES
Air-Powered Double Diaphragm Pumps

G15 Series

1/2” Port Size

16.6 GPM

Stall-Free Operation

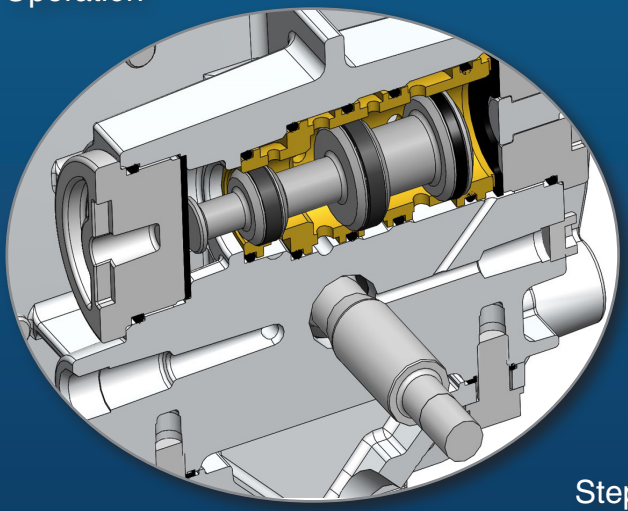

TECHNICAL SPECIFICATIONS

Maximum Flow Rate	16.6 GPM
Port Size	1/2” Female NPT
Air Supply Pressure	20-100 PSI
Liquid Temperature*	32-212°F
Body Material	Aluminum (AL), Stainless Steel, Kynar® & Pure Polypropylene
Maximum Air Consumption	24.7 SCFM
Maximum Size Solid	1/32” (1 mm)
Air Inlet	1/4 “ Female NPT
Discharge Volume Per Cycle	0.040-0.050 Gallons

**Pure Polypropylene pumps have a maximum liquid temperature of 180°F regardless of diaphragm material.*

Step-Spool




FEWER Parts.
INCREASED Reliability.


ELASTOMERIC OPTIONS

- PTFE
- Buna N Santoprene®
- Hytrel®

G15A Rubber Diaphragms

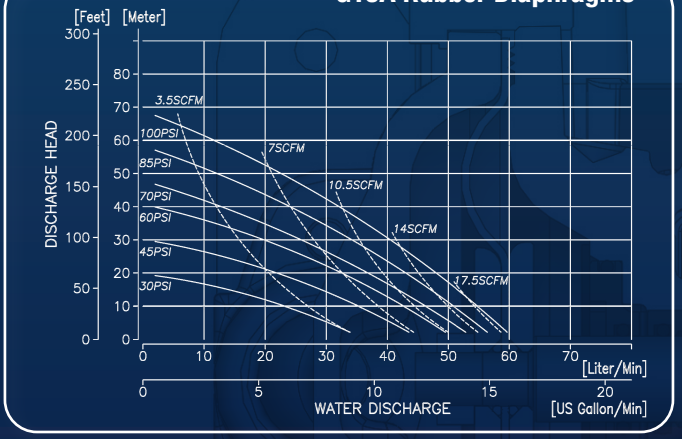

G15P PTFE Diaphragms

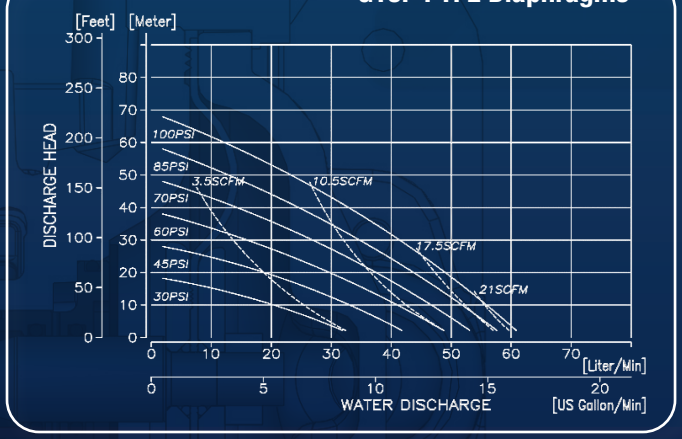

Additional curves at yamadapump.com.

YamadaPump.com
Toll Free (800) 990-7867

Local Distributor:

Form# G15Y1126

yamada

Yamada® is a registered trademark of Yamada America, Inc. The Proof’s in the Pump® is a registered trademark of Yamada America, Inc. The Proof is in the Pump® is a registered trademark of Yamada America, Inc. SolidPro® Designed to Pump Fluids Containing Solids is a registered trademark of Yamada America, Inc. Xtreme Duty Pro XDP® is a registered trademark of Yamada America, Inc. InkPRO® is a registered trademark of Yamada America, Inc. Santoprene® is a registered trademark of Monsanto Co. Hytrel® is a registered trademark of E.I. du Pont de Nemours and Company. Kynar® is a registered trademark of Arkema. Nordel™ is a trademark of DuPont Dow Elastomers. Ryton® is a registered trademark of Chevron Phillips Chemical Company. Viton® is a registered trademark of DuPont Performance Elastomers. Step Spool (S-Spool) C.L. 3/2/2017.