

DP-5F DATA SHEET

SPECIFICATIONS

Port Dimensions (2.91 GPM Max.)

Intake & discharge connection:

PTFE	1/4" NPT
	3/8" Flaretek

Air inlet (incl. ball valve):	1/4" Female NPT
-------------------------------	-----------------

Air exhaust (incl. silencer):	3/8" Female NPT
-------------------------------	-----------------

Liquid Temperature

PTFE	176°F (80°C) - 212°F (100°C)
------	------------------------------

Air Supply Pressure (All Models): 30–70 PSI

Discharge Volume Per Cycle: 0.00344 gallons

Maximum Cycles Per Minute: 845

Air Motor: Internally controlled is standard

Valve Type: Flat Only


Note:

Flat valve type pumps are not suitable for use in slurry liquid.

Consult factory for full pump options.

**Pump dimensions include ball valve and muffler.*

Performance Curve

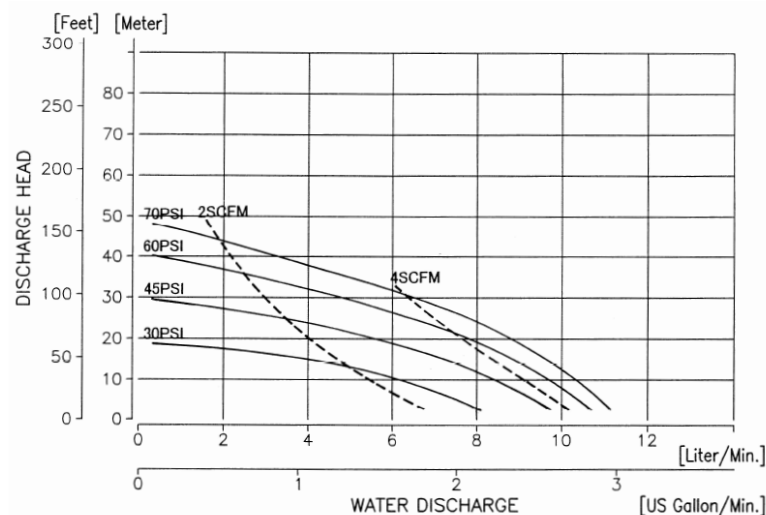

NPT Dimensions*:

7.56" L x 6.80" W x 7.91" H

Net Weight: 7.5 lbs. (3.4 kg)




Flaretek Dimensions*:

7.56" L x 6.26" W x 7.91" H


Net Weight: 7.5 lbs. (3.4 kg)

**Note: Pump dimensions include ball valve and muffler.*


Model Number Nomenclature

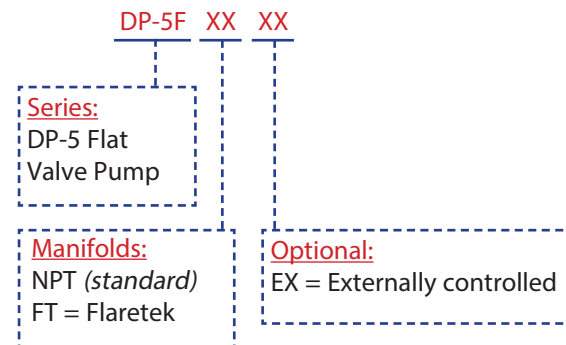

DP-5F NPT Dimensions

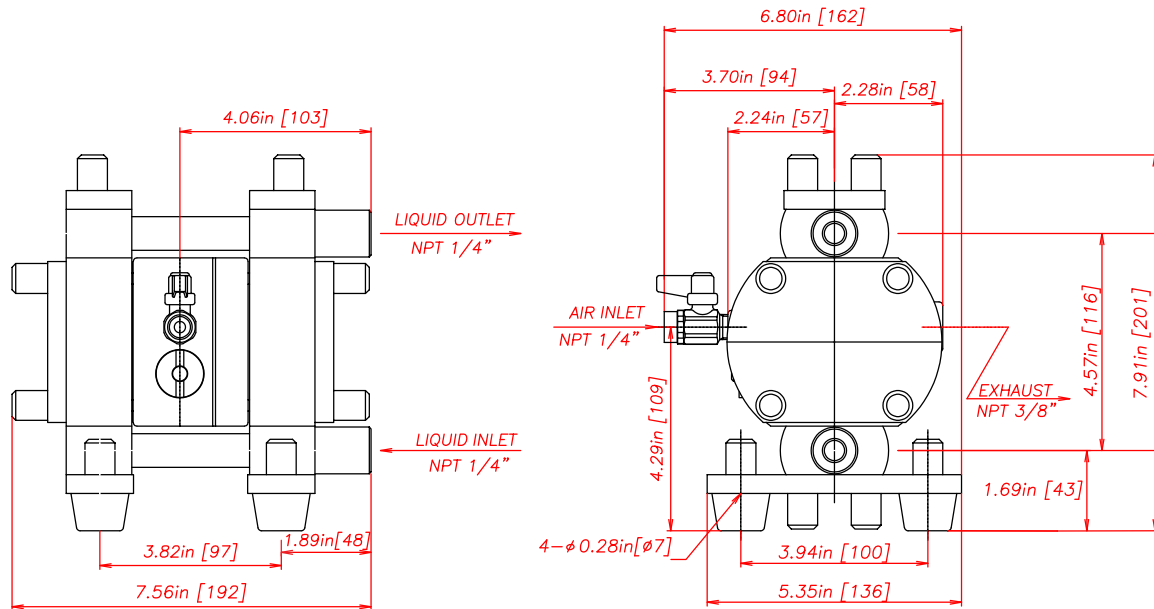

DP-5F FT Flaretek Dimensions

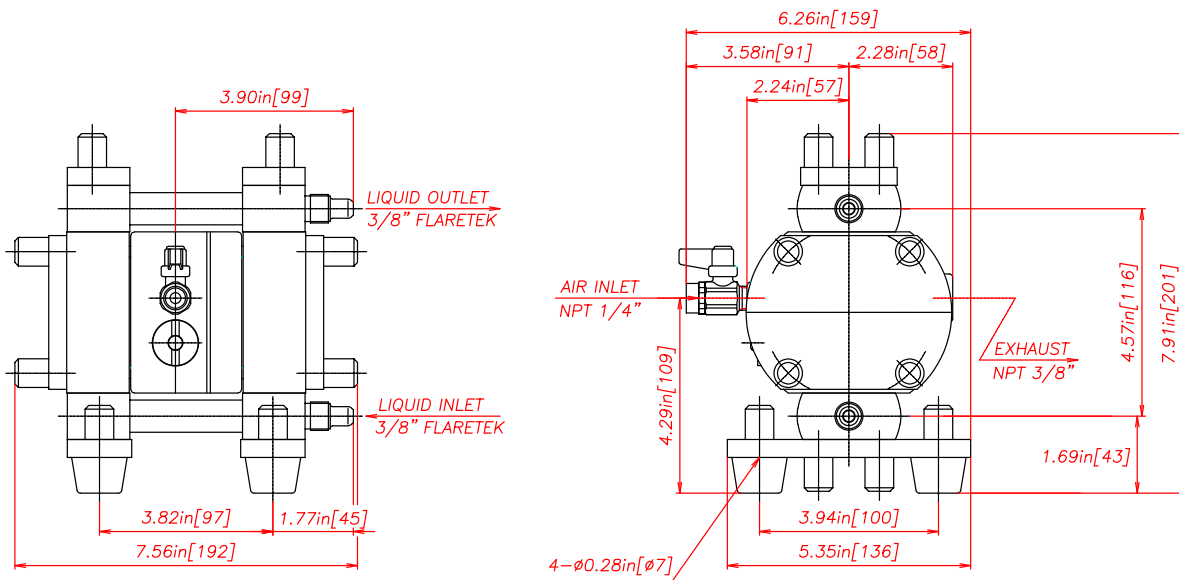

AutoCAD® is a registered trademark of Autodesk, Inc.
 Hytel® is a registered trademark of E.I. du Pont de Nemours and Company.
 Kynar® is a registered trademark of Arkema.
 Nordel™ is a trademark of DuPont Dow Elastomers.
 Ryton® is a registered trademark of Chevron Phillips Chemical Company.
 Santoprene® is a registered trademark of Advanced Elastomer Systems.
 Viton® is a registered trademark of DuPont Performance Elastomers.
 Swagelok™ & VCR™ are trademarks of the Swagelok Companies.
 Flaretek® is a registered trademark of Entegris.

Garlock ONE-UP® is a registered trademark of W.L. Gore & Associates.
 Yamada® is a registered trademark of Yamada America, Inc.
 SolidPRO Designed to Pump Fluids Containing Solids® is a registered trademark of Yamada America, Inc.
 Xtreme Duty ProXDP® is a registered trademark of Yamada America, Inc.
 The Proof's in the Pump® is a registered trademark of Yamada America, Inc.
 Engineered to Perform. Designed to Outlast.® is a registered trademark of Yamada America, Inc.

Due to Yamada's continued commitment to product improvement, specifications may change without notice.